



FCS RAC PTT

Radio Transmission and Reception Control Connector

产品特点

It adopts NTAO U-174 / U audio interface, and supports NTAO
U-174 / U standard earphone. The connector uses a standard
6-pin female connector, compatible with AJ series, AP series,
CG series and other types of NATO American 6-pin communication socket audio data interface.



技术规格	
Model	RAC PTT
● Key type	Push type
I nterface	NATO U-174/U
Connecto	Standard 6-pin connector
Weight	153g
Material	PVC mixed material
Length	790mm
Contact typ	Crimp

颜色分类








^{*} The data in this document is subject to change without notice. *

Product view

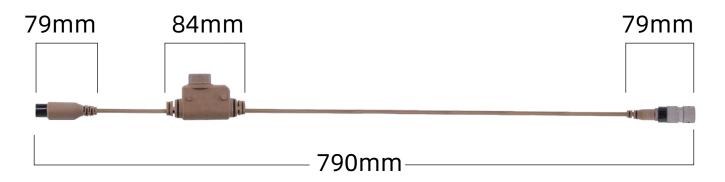



Top view





Right side view



Left side view





NATO U174/U





Standard 6-pin connector

^{*} The data in this document is subject to change without notice. *



FCS RAC PTT(MU)

Radio Transmission and Reception Control Connector

Product characteristics

It adopts NTAO U-174 / U audio interface, and supports NTAO
U-174 / U standard earphone. The connector uses a mini five-core XLR to connect the female connector.



Technical Specifications		
●Model	RAC PTT	
● Key type	Push type	
Interface	NATO U-174/U	
Connector	Mini 5-core XLR female connector	
Weight	79g	
Material	PVC mixed material	
Length	790mm	
Contact type	Crimp	

Color






Sand

Black

^{*} The data in this document is subject to change without notice. *

NATO U174/U

Product view

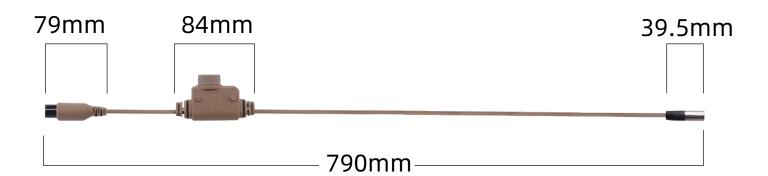




Mini five-core XLR female connector

^{*} The data in this document is subject to change without notice. *



Description for Supporting Adapter

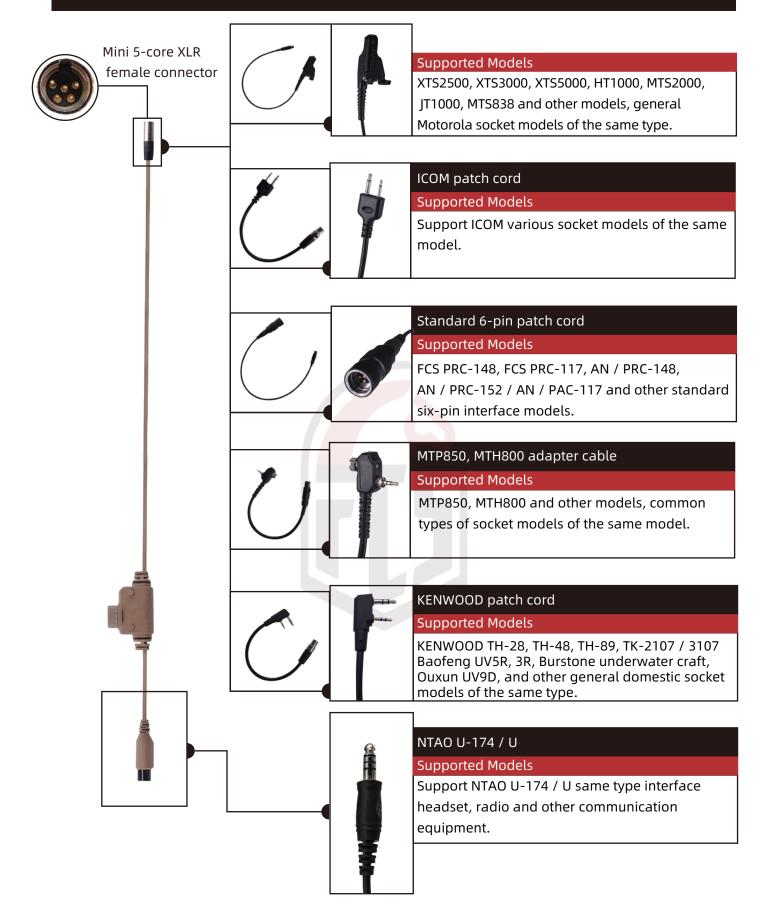

^{*} The data in this document is subject to change without notice. *

